


TY

JIS 大壓縮量中荷重彈簧(扁線)(紫色)

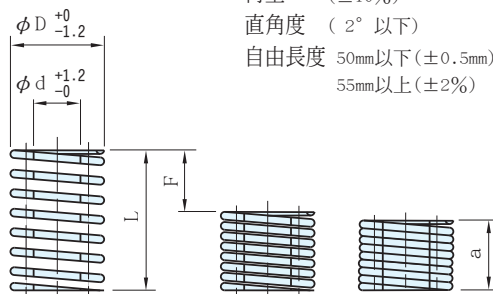

荷重 (±10%)
 直角度 (2° 以下)
 自由長度 50mm以下(±0.5mm)
 55mm以上(±2%)

Ma. 材質 SWOSC-V
 Co. 顏色 紫色

品 號	D	d	L	定數	a	F=L×40%	F=L×45%	F=L×50%	單 價						
	外 徑	內 徑	自由長	N/mm	密著長	壓縮量	壓縮量	壓縮量							
Type D - L	mm	mm	mm		mm	mm	N	mm	N	mm	N				
TY 14.5- 020	14.5	9	20	18.52	8	8	147.1	9.0	166.7	10.0	186.3				
025			25	14.82	10	10		11.3		12.5					
030			30	12.35	12	12		13.5		15.0					
035			35	10.58	14	14		15.8		17.5					
040			40	9.26	16	16		18.0		20.0					
045			45	8.23	18	18		20.3		22.5					
050			50	7.41	20	20		22.5		25.0					
055			55	6.74	22	22		24.8		27.5					
060			60	6.17	24	24		27.0		30.0					
065			65	5.70	26	26		29.3		32.5					
070			70	5.29	28	28		31.5		35.0					
075			75	4.94	30	30		33.8		37.5					
080			80	4.63	32	32		36.0		40.0					
090			90	4.12	36	36		40.5		45.0					
100			100	3.70	40	40		45.0		50.0					
125	125	2.96	50	50	56.3	62.5									
TY 17 - 025	17	11	25	21.80	10	10	215.7	11.3	245.2	12.5	274.6				
030			30	18.16	12	12		13.5		15.0					
035			35	15.57	14	14		15.8		17.5					
040			40	13.62	16	16		18.0		20.0					
045			45	12.11	18	18		20.3		22.5					
050			50	10.90	20	20		22.5		25.0					
055			55	9.91	22	22		24.8		27.5					
060			60	9.08	24	24		27.0		30.0					
065			65	8.38	26	26		29.3		32.5					
070			70	7.78	28	28		31.5		35.0					
075			75	7.27	30	30		33.8		37.5					
080			80	6.81	32	32		36.0		40.0					
090			90	6.05	36	36		40.5		45.0					
使用回數								100萬回		50萬回		30萬回			

TY JIS 大壓縮量中荷重彈簧(扁線)(紫色)

品 號	D	d	L	定 數	a	F=L×40%	F=L×45%	F=L×50%	單 價								
	外 徑	內 徑	自由長	N/mm	密著長	壓縮量	荷 重	壓縮量		荷 重	壓縮量	荷 重					
Type D - L	mm	mm	mm		mm	mm	N	mm	N	mm	N						
TY 17 - 100	17	11	100	5.45	40	40	215.7	45.0	245.2	50.0	274.6	•					
125			4.36	50	50	56.3		62.5									
150			3.63	60	60	67.5		75.0									
TY 21 - 030	21	13	30	23.24	12	12	284.4	13.5	313.8	15.0	353.0	•					
035			35	19.92	14	14		15.8		17.5							
040			40	17.43	16	16		18.0		20.0							
045			45	15.50	18	18		20.3		22.5							
050			50	13.95	20	20		22.5		25.0							
055			55	12.68	22	22		24.8		27.5							
060			60	11.62	24	24		27.0		30.0							
065			65	10.73	26	26		29.3		32.5							
070			70	9.96	28	28		31.5		35.0							
075			75	9.30	30	30		33.8		37.5							
080			80	8.72	32	32		36.0		40.0							
090			90	7.75	36	36		40.5		45.0							
100			100	6.97	40	40		45.0		50.0							
125			125	5.58	50	50		56.3		62.5							
150			150	4.65	60	60		67.5		75.0							
TY 26 - 030	26	16.5	30	34.87	12	12	411.9	13.5	470.7	15.0	519.8	•					
035			35	29.89	14	14		15.8		17.5							
040			40	26.15	16	16		18.0		20.0							
045			45	23.24	18	18		20.3		22.5							
050			50	20.92	20	20		22.5		25.0							
055			55	19.02	22	22		24.8		27.5							
060			60	17.43	24	24		27.0		30.0							
065			65	16.09	26	26		29.3		32.5							
070			70	14.94	28	28		31.5		35.0							
075			75	13.95	30	30		33.8		37.5							
080			80	13.08	32	32		36.0		40.0							
090			90	11.62	36	36		40.5		45.0							
100			100	10.46	40	40		45.0		50.0							
110			110	9.51	44	44		49.5		55.0							
125			125	8.37	50	50		56.3		62.5							
150			150	6.97	60	60		67.5		75.0							
175			175	5.98	70	70		78.8		87.5							
200			200	5.23	80	80		90.0		100.0							
TY 32 - 040			32	21	40	34.87		16		16		559.0	18.0	627.6	20.0	696.3	•
045					45	30.99		18		18			20.3		22.5		
050	50	27.89			20	20	22.5	25.0									
060	60	23.24			24	24	27.0	30.0									
070	70	19.92			28	28	31.5	35.0									
080	80	17.43			32	32	36.0	40.0									
使用回數						100萬回	50萬回	30萬回									

- 荷重(N)=定數(N/mm)×壓縮量(mm)
- 密著長是參考值,製作時會有少許差異
- 耐熱溫度200℃,最適合塑膠模使用
- 1N=0.101972Kgf

訂貨方式: 交期:

TY17-100

TY JIS 大壓縮量中荷重彈簧(扁線)(紫色)

品 號	D	d	L	定 數	a	F=L×40%		F=L×45%		F=L×50%		單 價					
	外 徑	內 徑	自由長	N/mm	密著長	壓縮量	荷 重	壓縮量	荷 重	壓縮量	荷 重						
Type D - L	mm	mm	mm		mm	mm	N	mm	N	mm	N						
TY 32 - 090	32	21	90	15.50	36	36	559.0	40.5	627.6	45.0	696.3	•					
100			13.95	40	40	45.0		50.0		•							
110			12.68	44	44	49.5		55.0		•							
125			11.16	50	50	56.3		62.5		•							
150			9.30	60	60	67.5		75.0		•							
175			7.97	70	70	78.8		87.5		•							
200			6.97	80	80	90.0		100.0		•							
250			5.58	100	100	112.5		125.0		•							
300			4.65	120	120	135.0		150.0		•							
TY 39 - 040			39	26	40	45.77		16		16		725.7	18.0	823.8	20.0	912.0	•
045	40.68	18			18	20.3	22.5	•									
050	36.61	20			20	22.5	25.0	•									
060	30.51	24			24	27.0	30.0	•									
070	26.15	28			28	31.5	35.0	•									
080	22.88	32			32	36.0	40.0	•									
090	20.34	36			36	40.5	45.0	•									
100	18.31	40			40	45.0	50.0	•									
110	16.64	44			44	49.5	55.0	•									
125	14.65	50			50	56.3	62.5	•									
150	12.20	60			60	67.5	75.0	•									
175	10.46	70			70	78.8	87.5	•									
200	9.15	80			80	90.0	100.0	•									
250	7.32	100			100	112.5	125.0	•									
300	6.10	120			120	135.0	150.0	•									
TY 46 - 050	46	32	50	48.81	20	20	970.9	22.5	1098	25.0	1216	•					
060			40.68	24	24	27.0		30.0		•							
070			34.87	28	28	31.5		35.0		•							
080			30.51	32	32	36.0		40.0		•							
090			27.12	36	36	40.5		45.0		•							
100			24.41	40	40	45.0		50.0		•							
110			22.19	44	44	49.5		55.0		•							
125			19.53	50	50	56.3		62.5		•							
150			16.27	60	60	67.5		75.0		•							
175			13.95	70	70	78.8		87.5		•							
200			12.20	80	80	90.0		100.0		•							
250			9.76	100	100	112.5		125.0		•							
300			8.14	120	120	135.0		150.0		•							
使用回數								100萬回		50萬回		30萬回					

- 荷重(N)=定數(N/mm)×壓縮量(mm)
- 密著長是參考值,製作時會有少許差異
- 耐熱溫度200°C,最適合塑膠模使用
- 1N=0.101972Kgf

訂貨方式:

品 號	交期:	1	天
-----	-----	---	---

 TY32-090