


NSWZ/NSWZH

止付螺絲(座付型)



- Ma. 材質** S45C
- Ha. 硬度** HRC33~38
- Tr. 處理** 四三酸化鐵被膜

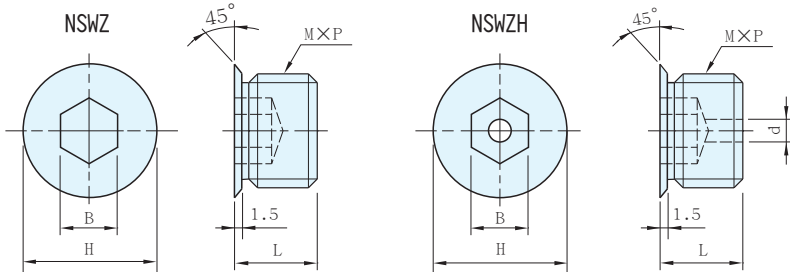


品 號	M × P	L	B	H	單 價	
NSWZ	06	6×1.0	8	3	9	•
	08	8×1.25	10	4	11	•
	10	10×1.5	12	5	13	•
	12	12×1.5		6	15	•
	14	14×1.5		8	17	•
	16	16×1.5		10	19	•
	18	18×1.5	15	12	21	•
	20	20×1.5		14	23	•
	22	22×1.5		12	25	•
	24	24×1.5		14	27	•
	25	25×1.5	17	14	28	•
	26	26×1.5		14	29	•
	27	27×1.5		14	30	•
	28	28×1.5		14	31	•
30	30×1.5	17	14	33	•	
33	33×1.5		14	36	•	

品 號	M × P	L	B	H	d	單 價
NSWZH	10	10×1.5	5	13	3	•
	12	12×1.5	6	15		•
	14	14×1.5		17		•
	16	16×1.5	8	19		•
	18	18×1.5	10	21	5	•
	20	20×1.5		23		•
	22	22×1.5	12	25		•
	24	24×1.5	15	27		•
	25	25×1.5		28	•	
	26	26×1.5		14	29	•
	27	27×1.5		14	30	•
	28	28×1.5	17	31	•	
	30	30×1.5		17	33	•
	33	33×1.5		17	36	•

訂貨方式： 交期：

NSWZ06

Ex. 使用例



■ 座付型

- 座的部份可防止止付螺絲鬆脫
- W倒角可控制止付螺絲下鎖深度