


Dowel pin-standard type PIN

Material: S45C

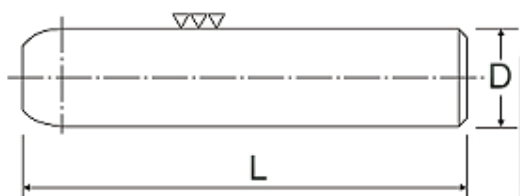

| D | | L | | | | | | | | | | | | | | | | | | | |
|----------|---------------------|--------------|-------------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|-----|-----|-----|-----|
| Diameter | Allowable tolerance | Total length | | | | | | | | | | | | | | | | | | | |
| | | 3 | +0 ~ +0.005 | 10 | 15 | 20 | 25 | 30 | 35 | 40 | | 50 | | | | | | | | | |
| 4 | 10 | 15 | | 20 | 25 | 30 | 35 | 40 | 45 | 50 | 55 | 60 | | 70 | | | | | | | |
| 5 | 10 | 15 | | 20 | 25 | 30 | 35 | 40 | 45 | 50 | | 60 | | 70 | | | | | | | |
| 6 | 10 | 15 | | 20 | 25 | 30 | 35 | 40 | 45 | 50 | 55 | 60 | | 70 | | 80 | | 90 | 100 | | |
| 8 | 10 | 15 | | 20 | 25 | 30 | 35 | 40 | 45 | 50 | 55 | 60 | 65 | 70 | 75 | 80 | 85 | 90 | 100 | 110 | 120 |
| 10 | 10 | 15 | | 20 | 25 | 30 | 35 | 40 | 45 | 50 | 55 | 60 | 65 | 70 | 75 | 80 | 85 | 90 | 100 | 110 | 120 |
| 12 | | | | 20 | 25 | 30 | 35 | 40 | 45 | 50 | 55 | 60 | 65 | 70 | 75 | 80 | 85 | 90 | 100 | 110 | 120 |
| 14 | | | | | | | | 40 | | 50 | | 60 | | 70 | | 80 | | 90 | 100 | | |
| 16 | | | | | | | 40 | | 50 | | 60 | | 70 | | 80 | | 90 | 100 | | | |