


輔助導柱

材質：S45C 硬度：HRC58~60

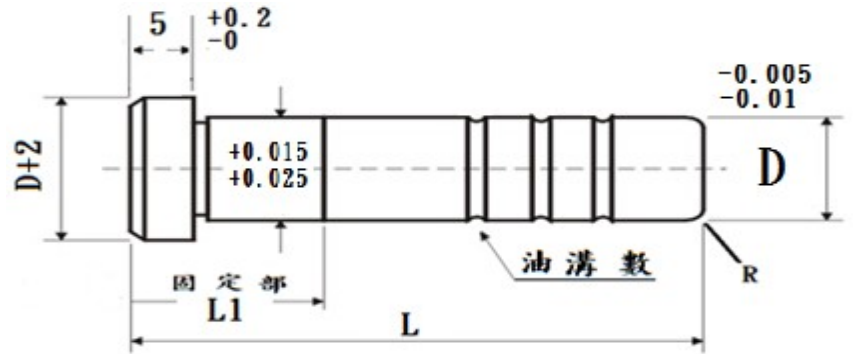

D		L1		R	L																								
直徑	容許公差	固定部	油溝數	倒圓弧	總長度																								
8	-0.005 ~ -0.01	15	2	2.5	40	50																							
		20	3		60	70	80	90																					
		25	4										100																
10		15	2	2.5	40	45	50	55																					
		20	3		60	65	70	75	80	90																			
		25	4										100																
12		15	2	3	40	45	50	55																					
		20	3		60	65	70	75	80	90																			
		25	4										100	110	120														
		28	6												130	140	150												
14		15	2	3	40	50	55																						
		20	3		60	65	70	75	80	85	90																		
		25	4										100	110	120														
		28	6												130	140	150	160											
16		15	2	3	40	45	50	55																					
		20	3		60	65	70	75	80	85	90																		
	25	4									100	110	120																
	28	6											130	140	150	160													
18	15	2	3		50	55																							
	20	3		60	65	70	75	80	90																				
	25	4										100	110	120															
	28	6												130	140	150													
20	15	2	3.5		50																								
	20	3		60	65	70	75	80	85	90																			
	25	4										100	110	120															
	28	6												130	140	150	160												
22	20	3	3.5		60	70	80	90																					
	25	4										100	110	120															
25	20	3	3.5		60	65	70	75	80	85	90																		
	25	4										100	100	120															
	30	6												130	140	150	160												